


FOOTMOTION PLATING SYSTEM.



GLOBAL FOOT
PLATING SOLUTION

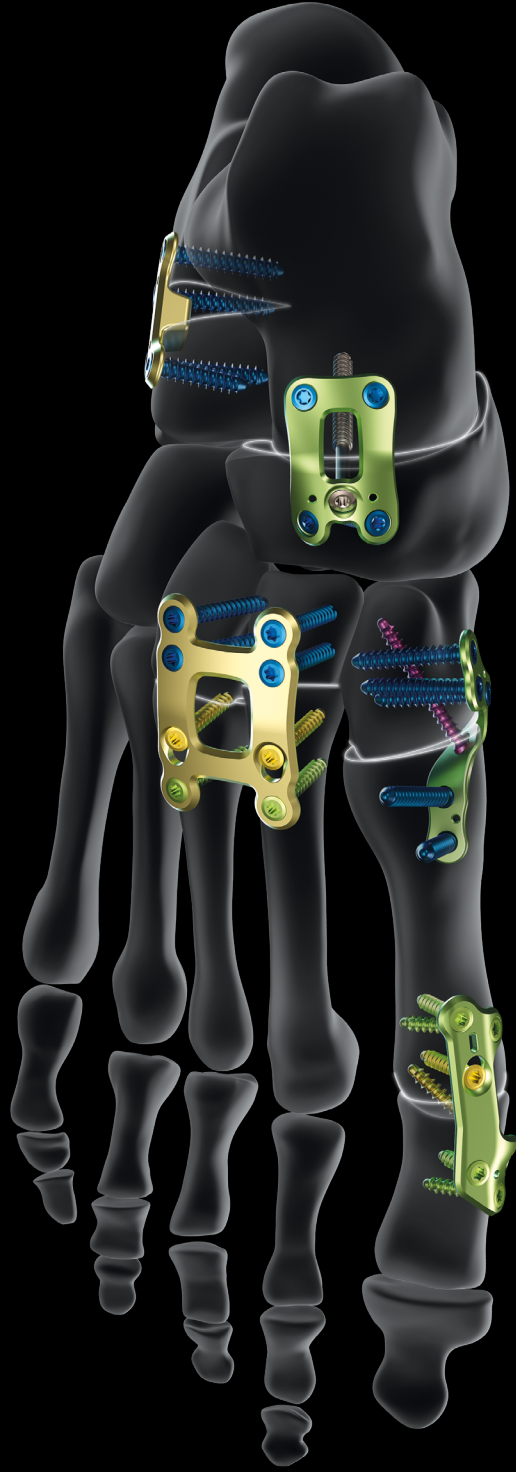

FOOTMOTION PLATING SYSTEM

Intended purpose:


The implants of the Footmotion Plating System are intended for arthrodeses, fractures and osteotomies fixation and revision surgeries of the foot in adults.

Contraindications:

- Pregnancy.
- Acute or chronic local or systemic infections.
- Allergy to one of the materials used or sensitivity to foreign bodies.


→ MEDIAL LISFRANC ARTHRODESES PLATES

Examples of application: structural instability, fracture/dislocation

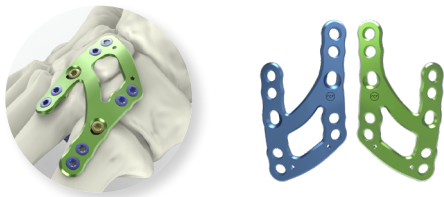


→ DORSAL LISFRANC ARTHRODESES PLATES

Examples of application: osteoarthritis, fracture, Lisfranc joint dislocation; fracture/dislocation after-effects



→ 1ST METATARSOPHALANGEAL ARTHRODESIS PLATES

Examples of application: hallux rigidus, severe hallux valgus, polyarthritis

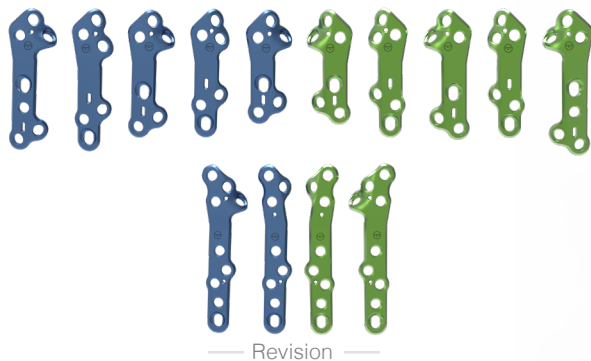

→ MINI INVASIVE BUNION OSTEOTOMY PLATES

Example of application: hallux valgus



+ → STRAIGHT PLATES



→ OPENING BASE WEDGE OSTEOTOMY PLATES

Example of application: severe hallux valgus



→ ISOLATED LISFRANC ARTHRODESIS PLATES

Examples of application: osteoarthritis, fracture, Lisfranc joint dislocation, fracture/dislocation after-effects




→ COTTON OSTEOTOMY PLATES

Examples of application: plantar flexion osteotomy, osteotomy of the medial cuneiform




→ EVANS OSTEOTOMY PLATES

Examples of application: flatfoot, calcaneocuboid (CC) joint arthrodesis

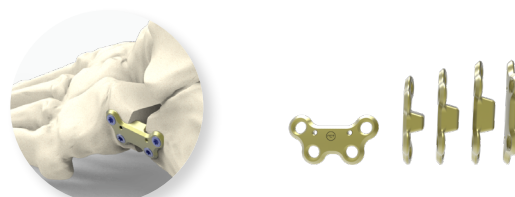

→ CALCANEAL DISPLACEMENT OSTEOTOMY PLATES

Examples of application: osteoarthritis, flatfoot and cavus foot

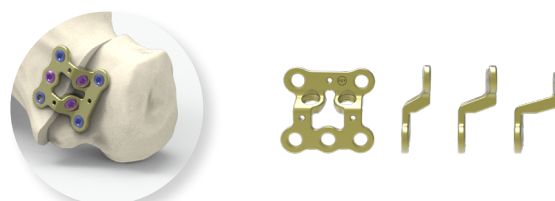


→ TALO-NAVICULAR ARTHRODESIS PLATES

Examples of application: osteoarthritis, high arched foot, equinovarus, flatfoot, traumatic after-effects



→ LAPIDUS ARTHRODESIS PLATES


Examples of application: hallux valgus, osteoarthritis, functional deformity

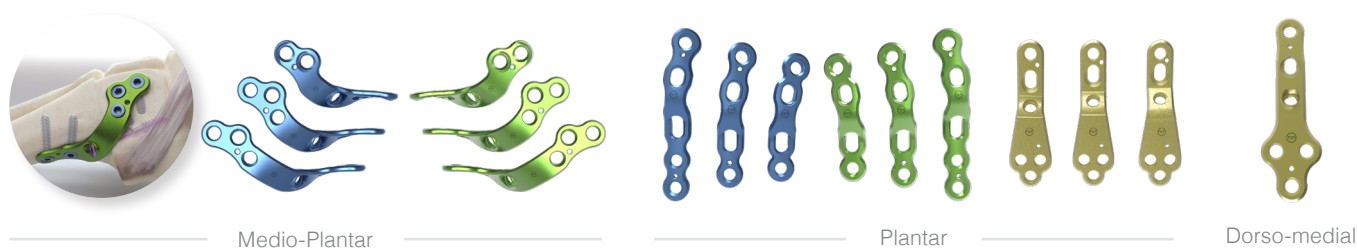

TECHNICAL FEATURES

PRECONTOURED IMPLANTS

The design of these implants is the result of a proprietary state-of-the-art mapping technology to establish the maximum congruence between the plate and the bone.


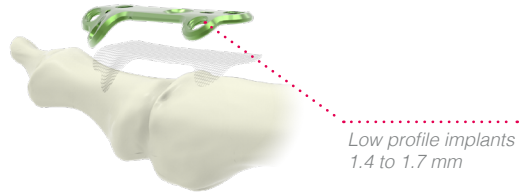


ADAPTABLE FIXATION AND SCREW FEATURES

- **One type of locking hole for two screw diameters:** Ø2.8 mm and Ø3.5 mm.
- **Locking** (SLT2.8Lxx and SLT3.5Lxx) and **non locking screws** (RLT2.8Lxx and RLT3.5Lxx) are available in two diameters. **Lag screws** are available in one diameter: Ø3.5 mm (QLT3.5Lxx).
- **Hexalobular screw recess design (T8)**



LOCKING SYSTEM

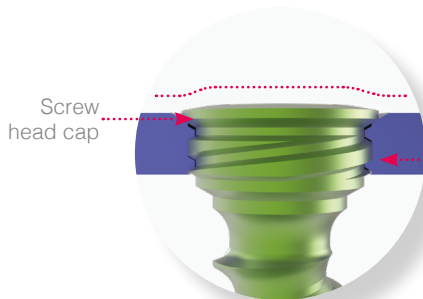

The threads under the screw head and inside the hole have strictly the same geometrical characteristics.

Features:

- The screw head is stopped in the hole by its cap, ensuring the locking.
- Plate and screws are all made of titanium.



COMPRESSIVE SYSTEM

Ramp oblong hole

Ramp oblong holes allowing a guided axial compression by using the screw/plate interface.



- ⚠ Only Ø2.8 mm non-locking screws (RLT2.8Lxx) can be used for the ramp oblong hole.

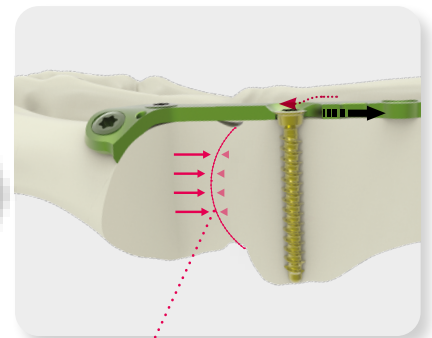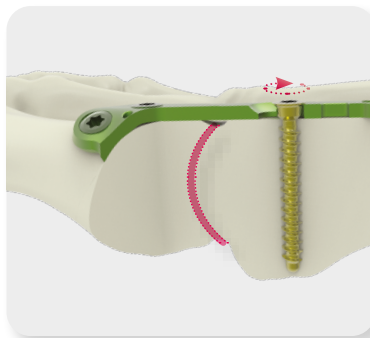

Compression of the joint up to 1.5 mm

A COMPREHENSIVE RANGE OF PLATES

PLATES FOR 1ST METATARSOPHALANGEAL ARTHRODESIS



Examples of application: hallux valgus, severe hallux valgus, polyarthritis

→ 1ST MTP ARTHRODESIS PLATES

→ 1ST MTP ARTHRODESIS REVISION PLATES





Standard plates with transarticular screw

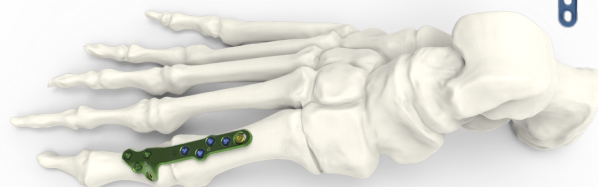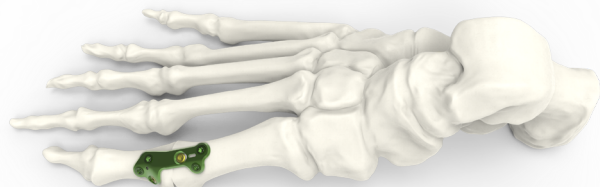

► **Hole for the transarticular screw:** a transarticular screw crossing the 1st MTP joint goes through the plate.



Narrow plates without transarticular screw

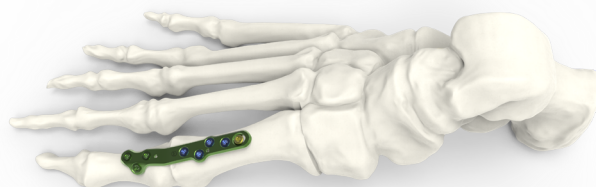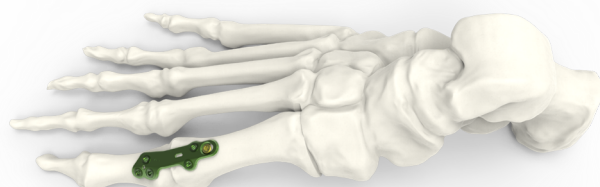

NB: when using a plate without the transarticular screw, another screw (ref. H1.25QT3.5Lxx-ST or H1.4QT4.0Lxx-ST) can be inserted across the plantar aspect of the joint, outside of the plate. Please refer to Initial S range for further details.

→ CLINICAL CASE

Example of surgery using a plate for 1st metatarsophalangeal arthrodesis with transarticular screw.



► Left foot showing a 1st MTP osteoarthritis.



► The solution: plate for 1st MTP arthrodesis with transarticular screw (ref: FMTGD1)



► 2 months post operative x-ray.


A COMPREHENSIVE RANGE OF PLATES

PLATES FOR DORSAL LISFRANC ARTHRODESES

Examples of application: osteoarthritis, fracture, Lisfranc joint dislocation, fracture/dislocation after-effects

→ TECHNICAL FEATURES

- 2 possible constructs: C2-C3-M2-M3 or C3-cuboid-M3-M4 arthrodeses.
- Solutions for midfoot arthrodeses.
- 10° cuneo-metatarsal sagittal angle.
- Compression thanks to the ramp oblong holes.

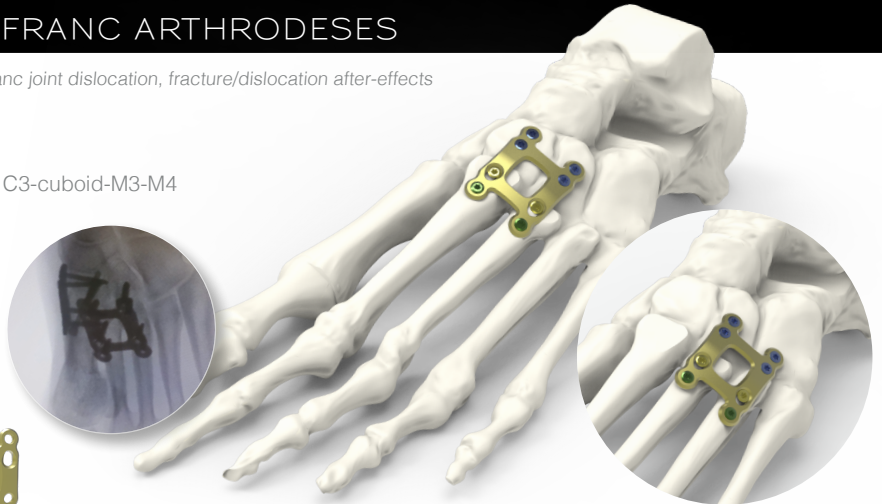


PLATES FOR MEDIAL LISFRANC ARTHRODESES

Examples of application: structural instability, fracture/dislocation

→ TECHNICAL FEATURES

- Converging screws
- 10° cuneo-metatarsal sagittal angle.
- 10° intermetatarsal angle.
- Compression thanks to the ramp oblong holes.

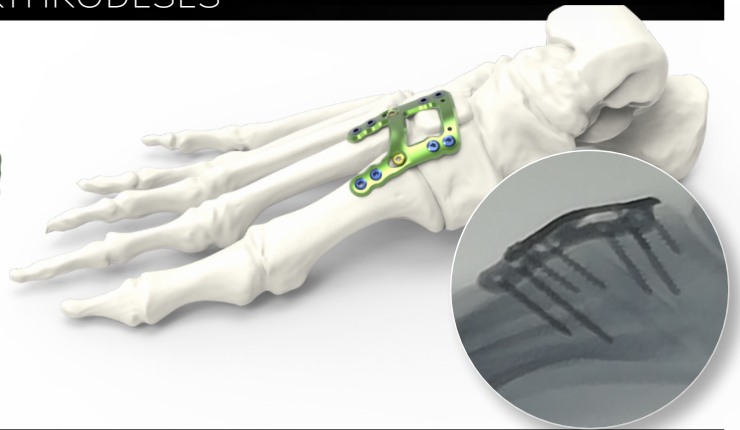


PLATES FOR ISOLATED LISFRANC ARTHRODESIS

Examples of application: osteoarthritis, fracture, Lisfranc joint dislocation, fracture/dislocation after-effects

→ TECHNICAL FEATURES

- Comprehensive range of plates adapted to various shapes of cuneiform.
- Converging screws.
- Positioning on several rays: TMT2 or TMT3 arthrodesis.
- Dorso-plantar transarticular screw crossing the joint and the plate for compression.
- Two types of transarticular screws:

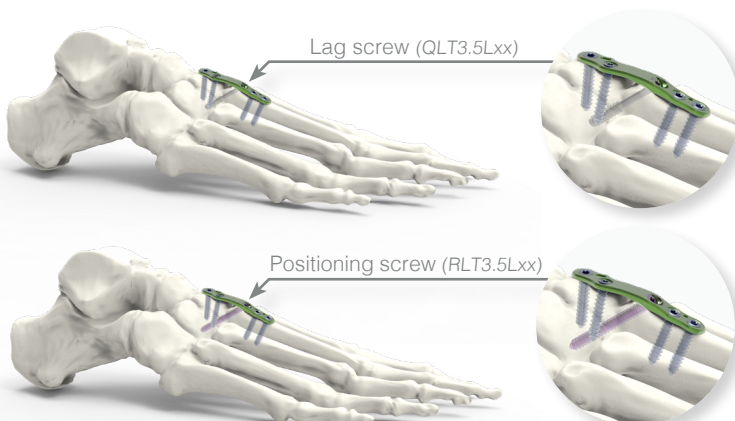

A COMPREHENSIVE RANGE OF PLATES


PLATES FOR PLANTAR LAPIDUS ARTHRODESIS

Examples of application: hallux valgus, osteoarthritis, functional deformity

→ TECHNICAL FEATURES


- Full range of precontoured and anatomical plantar implants.

PLANTAR NARROW PLATES

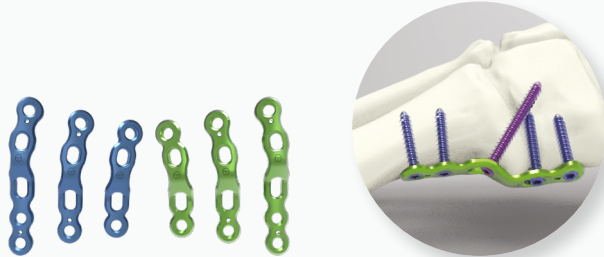


The narrow plates for plantar lapidus are made of grade 2 titanium for an adaptation to first tarsometatarsal (TMT1) joint anatomies when using bending pliers.

STANDARD PLANTAR PLATES

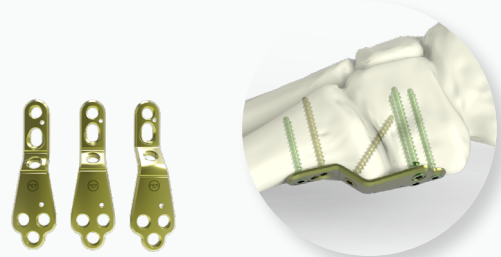


The standard plates for plantar lapidus are made of grade 5 titanium and have 3 offsets (3, 5, 7 mm).

- **Plantar positioning of the plate** offers a strong mechanical assembly allowing immediate weight-bearing.
- **3.5 mm single diameter fixation for the narrow plates:**
 - 2 oblong holes for Ø3.5 mm non locking screws:
 - Distal oblong hole for a screw angulation up to 35°
 - Oblong holes positioning allows to avoid conflicts between screws.
 - 2 or 3 locking holes for Ø3.5 mm locking screws.

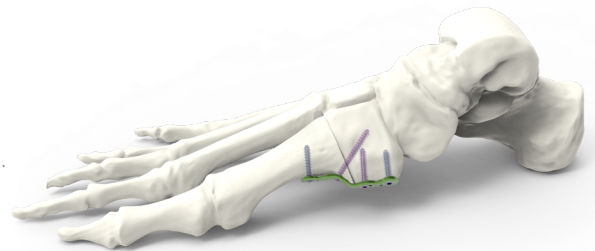

- **Screw angulation up to 35°**



→ CLINICAL CASE: NARROW PLATE FOR PLANTAR LAPIDUS ARTHRODESIS



Hallux valgus and ligamentous hyperlaxity.

A COMPREHENSIVE RANGE OF PLATES

PLATES FOR MEDIO-PLANTAR LAPIDUS ARTHRODESIS

Examples of application: severe hallux valgus and ligament hyperlaxity

→ TECHNICAL FEATURES

• Medio-plantar positioning of the plate

- Avoids the anterior tibial tendon insertion minimizing the risk of impingement.
- Direct access to the cuneiform holes through a medial approach.
- The transarticular screw is inserted through the joint providing compression.





PLATE FOR DORSO-MEDIAL LAPIDUS ARTHRODESIS

Examples of application: osteoarthritis, functional deformity

→ TECHNICAL FEATURES

- Precontoured implant.
- Thickness of 1.6 mm.
- Transarticular screw.

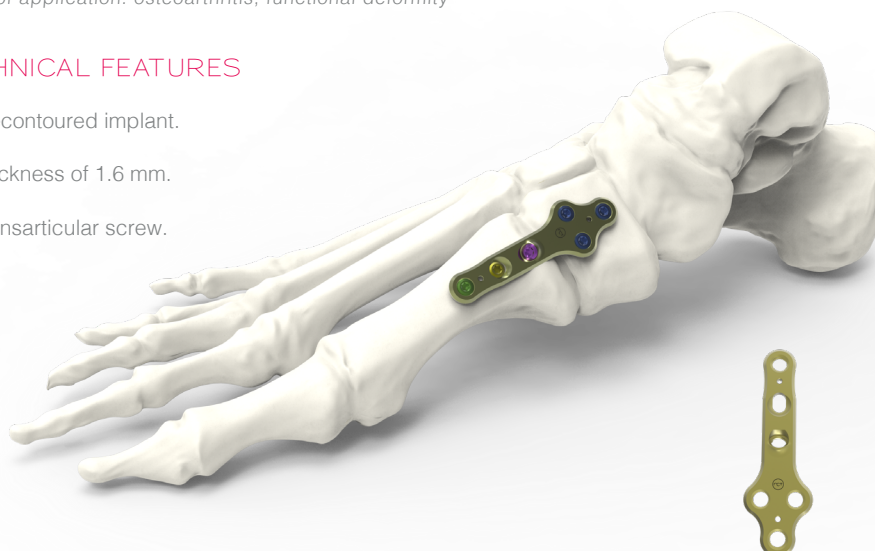

A COMPREHENSIVE RANGE OF PLATES

PLATES FOR MINI INVASIVE BUNION OSTEOTOMY

Example of application: hallux valgus



→ TECHNICAL FEATURES

- Unique design dedicated to bunion metatarsal osteotomies for severe hallux valgus.
- External guide for minimally invasive surgery.



ANC1057 & ANC1058

- Transfixation screw crossing the cut allowing compression.

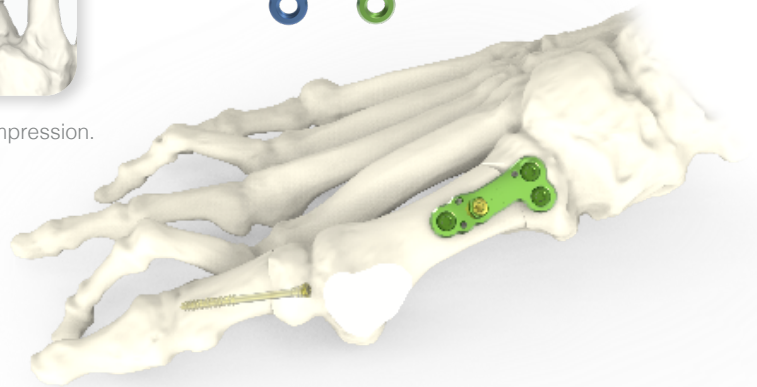


PLATES FOR OPENING BASE WEDGE METATARSAL OSTEOTOMY

Examples of application: severe hallux valgus, flatfoot

→ TECHNICAL FEATURES

- A wedge is integrated into the plate: the wedge size depends on the correction angle. 3 sizes are available: 3, 4, 5 mm and 1 neutral plate.
- Low profile plate: 1.4 mm thick.
- Converging proximal screws
- **3-in-1 dedicated instrument:** distraction, compression and osteotomies.

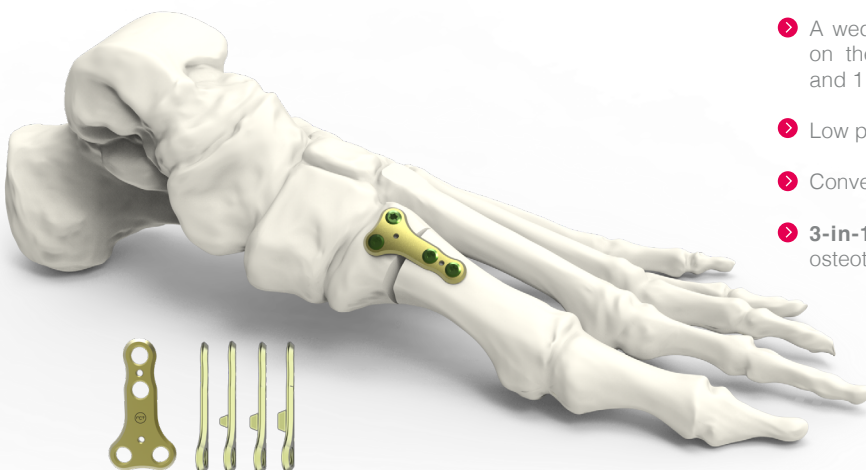

ANC642


A COMPREHENSIVE RANGE OF PLATES

PLATES FOR TALO-NAVICULAR ARTHRODESIS


Examples of application: arthrosis, flatfoot

→ TECHNICAL FEATURES

- Converging screws
- Transarticular screw allowing compression

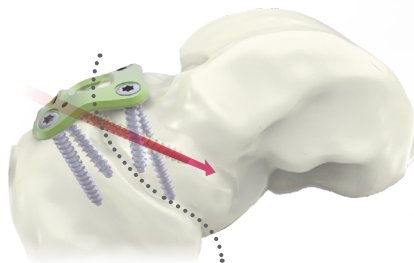

- 2 types of plates:
 - Dorsal approach between the extensor hallucis longus and the tibialis anterior tendon.
 - Medial approach between the tibialis anterior tendon and the tibialis posterior tendon.

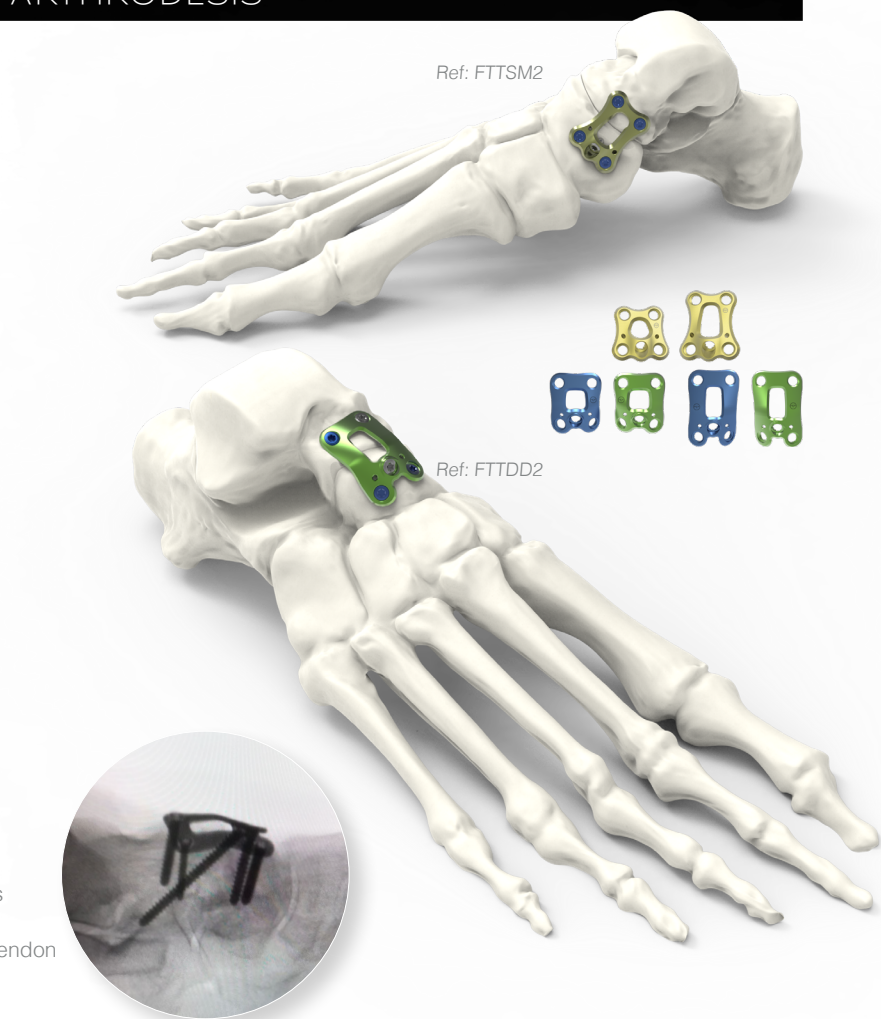


PLATES FOR CALCANEAL DISPLACEMENT OSTEOTOMY

Examples of application: flatfoot, osteoarthritis, cavus foot

→ TECHNICAL FEATURES

- A calcaneal displacement of 5, 7.5 or 10 mm **maintained by the step-design of the plate.**
- **A central window** allowing a better visualization of the osteotomy site.
- **A non locking central screw** allowing the calcaneal shift without a specific instrumentation.
- **Two transfixation screws** allowing the compression between the two bone fragments.

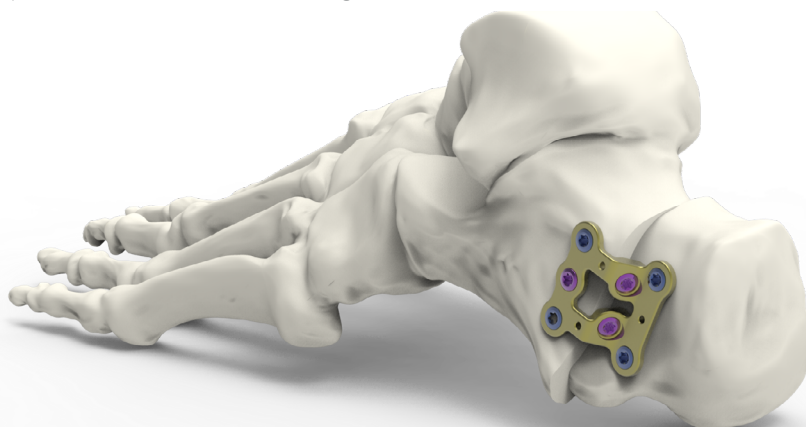

A COMPREHENSIVE RANGE OF PLATES

PLATES FOR EVANS OSTEOTOMY

Examples of application: flatfoot, calcaneocuboid (CC) joint arthrodesis

→ TECHNICAL FEATURES

➤ Precontoured plates respecting:


- The calcaneal anatomy.
- The calcaneocuboid joint.

➤ Converging screws


➤ 2 types of plates:

- Plates with wedge for osteotomies (6, 8, 10 mm).
- Plate without wedge for graft addition and CC joint fusion.

➤ 3-in-1 dedicated instruments: distraction, compression and osteotomies.

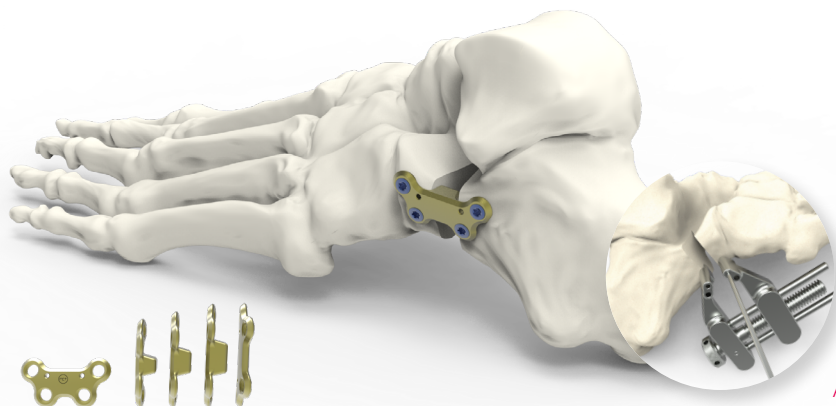

ANC642



PLATES FOR COTTON OSTEOTOMY

Example of application: plantar flexion osteotomy of the medial cuneiform


→ TECHNICAL FEATURES

➤ Precontoured plates respecting the 1st cuneiform anatomy.

➤ Converging screws

➤ 2 types of plates:


- Plates with wedge for osteotomy (4.5, 5.5, 6.5 mm).
- Plate without wedge for graft addition.



→ STRAIGHT PLATES FOR VARIOUS APPLICATIONS

The Footmotion Plating System set offers a complete range of compressive straight plates designed for treatment of fractures, osteotomies and fusions for small bones and bone fragments of the foot.


- From 2 to 7 holes (from 20 mm to 45 mm)
- Compression thanks to ramp oblong hole
- Bendable plates for several constructs
- 1.5 mm thick

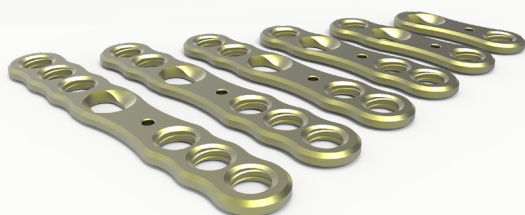

IMPLANT REFERENCES

1ST MTP ARTHRODESIS PLATES

Ref.	Description	Length
FMTGDN1	1st MTP arthrodesis plate - Narrow - Left - Size 1	41.6 mm
FMTDDN1	1st MTP arthrodesis plate - Narrow - Right - Size 1	41.6 mm
FMTGDN2	1st MTP arthrodesis plate - Narrow - Left - Size 2	46.4 mm
FMTDDN2	1st MTP arthrodesis plate - Narrow - Right - Size 2	46.4 mm
FMTGD1	1st MTP arthrodesis plate - Standard - Left - Size 1	36.5 mm
FMTDD1	1st MTP arthrodesis plate - Standard - Right - Size 1	36.5 mm
FMTGD2	1st MTP arthrodesis plate - Standard - Left - Size 2	41.5 mm
FMTDD2	1st MTP arthrodesis plate - Standard - Right - Size 2	41.5 mm
FMTGD3	1st MTP arthrodesis plate - Standard - Left - Size 3	46.5 mm
FMTDD3	1st MTP arthrodesis plate - Standard - Right - Size 3	46.5 mm

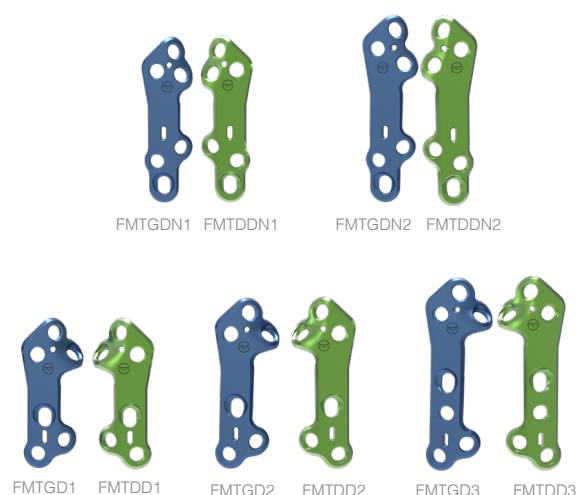

1ST MTP ARTHRODESIS REVISION PLATES

Ref.	Description	Length
FMTGDN4	1st MTP arthrodesis plate - Narrow - Left - Size 4	60.5 mm
FMTDDN4	1st MTP arthrodesis plate - Narrow - Right - Size 4	60.5 mm
FMTGD4	1st MTP arthrodesis plate - Standard - Left - Size 4	60.5 mm
FMTDD4	1st MTP arthrodesis plate - Standard - Right - Size 4	60.5 mm



DORSAL LISFRANC ARTHRODESES PLATES

Ref.	Description	Width
FDTSDN1	Dorsal Lisfranc arthrodesis plate - Narrow - Symmetrical - Size 1	19 mm
FDTSDS1	Dorsal Lisfranc arthrodesis plate - Standard - Symmetrical - Size 1	22 mm
FDTSDW1	Dorsal Lisfranc arthrodesis plate - Wide - Symmetrical - Size 1	25 mm



MEDIAL LISFRANC ARTHRODESES PLATES

Ref.	Description	Length
FETGD1	Medial Lisfranc arthrodesis plate - Left - Size 1	53.4 mm
FETDD1	Medial Lisfranc arthrodesis plate - Right - Size 1	53.4 mm



ISOLATED LISFRANC ARTHRODESIS PLATES

Ref.	Description	Length
FUTGD1	Isolated Lisfranc arthrodesis plate - Left - Size 1	42.6 mm
FUTDD1	Isolated Lisfranc arthrodesis plate - Right - Size 1	42.6 mm
FUTSD1	Isolated Lisfranc arthrodesis plate - Symmetrical - Size 1	37.7 mm



IMPLANT REFERENCES

PLANTAR LAPIDUS ARTHRODESIS PLATES

Ref.	Description	Length
FLTSV1	Plantar Lapidus arthrodesis plate - Symmetrical - Size 1 - 3 mm	44.6 mm
FLTSV2	Plantar Lapidus arthrodesis plate - Symmetrical - Size 2 - 5 mm	44.6 mm
FLTSV3	Plantar Lapidus arthrodesis plate - Symmetrical - Size 3 - 7 mm	44.6 mm



PLANTAR LAPIDUS ARTHRODESIS PLATES - NARROW

Ref.	Description	Length
FLTGV0	Plantar Lapidus arthrodesis plate - Narrow - Left - Size 0	37.0 mm
FLTDV0	Plantar Lapidus arthrodesis plate - Narrow - Right - Size 0	37.0 mm
FLTGV1	Plantar Lapidus arthrodesis plate - Narrow - Left - Size 1	41.8 mm
FLTDV1	Plantar Lapidus arthrodesis plate - Narrow - Right - Size 1	41.8 mm
FLTGV2	Plantar Lapidus arthrodesis plate - Narrow - Left - Size 2	49.8 mm
FLTDV2	Plantar Lapidus arthrodesis plate - Narrow - Right - Size 2	49.8 mm



MEDIO-PLANTAR LAPIDUS ARTHRODESIS PLATES

Ref.	Description	Length
FLTGMV0	Medio-plantar Lapidus arthrodesis plate - Left - Size 0	35.9 mm
FLTDMV0	Medio-plantar Lapidus arthrodesis plate - Right - Size 0	35.9 mm
FLTGMV1	Medio-plantar Lapidus arthrodesis plate - Left - Size 1	42.6 mm
FLTDMV1	Medio-plantar Lapidus arthrodesis plate - Right - Size 1	42.6 mm
FLTGMV2	Medio-plantar Lapidus arthrodesis plate - Left - Size 2	46.8 mm
FLTDMV2	Medio-plantar Lapidus arthrodesis plate - Right - Size 2	46.8 mm



DORSO-MEDIAL LAPIDUS ARTHRODESIS PLATE

Ref.	Description	Length
FLTSM1	Dorso-medial Lapidus arthrodesis plate - Symmetrical - Size 1	50 mm



METATARSAL CLOSING WEDGE PLATE

Ref.	Description	Length
FFTGD1	Metatarsal basal closing wedge plate - Left - Size 1	29.2 mm
FFTDD1	Metatarsal basal closing wedge plate - Right - Size 1	29.2 mm



METATARSAL OPENING WEDGE PLATES

Ref.	Description	Length
FOTSM0	Metatarsal basal opening wedge osteotomy plate - Symmetrical - 0 mm	28 mm
FOTSM3	Metatarsal basal opening wedge osteotomy plate - Symmetrical - 3 mm	28 mm
FOTSM4	Metatarsal basal opening wedge osteotomy plate - Symmetrical - 4 mm	28 mm
FOTSM5	Metatarsal basal opening wedge osteotomy plate - Symmetrical - 5 mm	28 mm



IMPLANT REFERENCES

TALO-NAVICULAR ARTHRODESIS PLATES

Ref.	Description	Length
FTTGD1	Dorsal Talo-Navicular arthrodesis plate - Left - Size 1	22.3 mm
FTTDD1	Dorsal Talo-Navicular arthrodesis plate - Right - Size 1	22.3 mm
FTTGD2	Dorsal Talo-Navicular arthrodesis plate - Left - Size 2	28.3 mm
FTTDD2	Dorsal Talo-Navicular arthrodesis plate - Right - Size 2	28.3 mm
FTTSM1	Medial Talo-Navicular arthrodesis plate - Symmetrical - Size 1	21 mm
FTTSM2	Medial Talo-Navicular arthrodesis plate - Symmetrical - Size 2	26 mm



CALCANEAL DISPLACEMENT OSTEOTOMY PLATES

Ref.	Description	Width
FATSL5	Calcaneal displacement osteotomy plate - Symmetrical - 5 mm	21.5 mm
FATSL7.5	Calcaneal displacement osteotomy plate - Symmetrical - 7.5 mm	21.5 mm
FATSL10	Calcaneal displacement osteotomy plate - Symmetrical - 10 mm	21.5 mm



EVANS OSTEOTOMY PLATES

Ref.	Description	Length
FVTSLO	Evans osteotomy plate - Symmetrical - 0 mm	30 mm
FVTSL6	Evans osteotomy plate - Symmetrical - 6 mm	26 mm
FVTSL8	Evans osteotomy plate - Symmetrical - 8 mm	28 mm
FVTSL10	Evans osteotomy plate - Symmetrical - 10 mm	30 mm



COTTON OSTEOTOMY PLATES

Ref.	Description	Length
FCTSM0	Cotton osteotomy plate - Symmetrical - 0 mm	24 mm
FCTSM4.5	Cotton osteotomy plate - Symmetrical - 4.5 mm	22 mm
FCTSM5.5	Cotton osteotomy plate - Symmetrical - 5.5 mm	23 mm
FCTSM6.5	Cotton osteotomy plate - Symmetrical - 6.5 mm	24 mm




STRAIGHT PLATES

Ref.	Description	Length
FUTS1	Straight plate - Symmetrical - Size 1 - 2 holes	20 mm
FUTS2	Straight plate - Symmetrical - Size 2 - 3 holes	25 mm
FUTS3	Straight plate - Symmetrical - Size 3 - 4 holes	30 mm
FUTS4	Straight plate - Symmetrical - Size 4 - 5 holes	35 mm
FUTS5	Straight plate - Symmetrical - Size 5 - 6 holes	40 mm
FUTS6	Straight plate - Symmetrical - Size 6 - 7 holes	45 mm



IMPLANT REFERENCES

→ Ø2.8 MM SCREWS



LOCKING SCREWS*

Ref.	Description
SLT2.8L10	Ø2.8 mm locking screw - L10 mm
SLT2.8L12	Ø2.8 mm locking screw - L12 mm
SLT2.8L14	Ø2.8 mm locking screw - L14 mm
SLT2.8L16	Ø2.8 mm locking screw - L16 mm
SLT2.8L18	Ø2.8 mm locking screw - L18 mm
SLT2.8L20	Ø2.8 mm locking screw - L20 mm
SLT2.8L22	Ø2.8 mm locking screw - L22 mm
SLT2.8L24	Ø2.8 mm locking screw - L24 mm
SLT2.8L26	Ø2.8 mm locking screw - L26 mm
SLT2.8L28	Ø2.8 mm locking screw - L28 mm
SLT2.8L30	Ø2.8 mm locking screw - L30 mm
SLT2.8L32	Ø2.8 mm locking screw - L32 mm
SLT2.8L34	Ø2.8 mm locking screw - L34 mm

* Green anodized


→ Ø3.5 MM SCREWS



LOCKING SCREWS*

Ref.	Description
SLT3.5L10	Ø3.5 mm locking screw - L40 mm
SLT3.5L12	Ø3.5 mm locking screw - L40 mm
SLT3.5L14	Ø3.5 mm locking screw - L40 mm
SLT3.5L16	Ø3.5 mm locking screw - L40 mm
SLT3.5L18	Ø3.5 mm locking screw - L40 mm
SLT3.5L20	Ø3.5 mm locking screw - L40 mm
SLT3.5L22	Ø3.5 mm locking screw - L40 mm
SLT3.5L24	Ø3.5 mm locking screw - L40 mm
SLT3.5L26	Ø3.5 mm locking screw - L40 mm
SLT3.5L28	Ø3.5 mm locking screw - L40 mm
SLT3.5L30	Ø3.5 mm locking screw - L40 mm
SLT3.5L32	Ø3.5 mm locking screw - L40 mm
SLT3.5L34	Ø3.5 mm locking screw - L40 mm
SLT3.5L36	Ø3.5 mm locking screw - L40 mm
SLT3.5L38	Ø3.5 mm locking screw - L40 mm
SLT3.5L40	Ø3.5 mm locking screw - L40 mm


* Blue anodized



LAG SCREWS* (AVAILABLE ONLY IN STERILE PACKAGING)

Ref.	Description
QLT3.5L20-ST	Ø3.5 mm lag screw - L20 mm - STERILE
QLT3.5L22-ST	Ø3.5 mm lag screw - L22 mm - STERILE
QLT3.5L24-ST	Ø3.5 mm lag screw - L24 mm - STERILE
QLT3.5L26-ST	Ø3.5 mm lag screw - L26 mm - STERILE
QLT3.5L28-ST	Ø3.5 mm lag screw - L28 mm - STERILE
QLT3.5L30-ST	Ø3.5 mm lag screw - L30 mm - STERILE
QLT3.5L32-ST	Ø3.5 mm lag screw - L32 mm - STERILE
QLT3.5L34-ST	Ø3.5 mm lag screw - L34 mm - STERILE
QLT3.5L36-ST	Ø3.5 mm lag screw - L36 mm - STERILE
QLT3.5L38-ST	Ø3.5 mm lag screw - L38 mm - STERILE
QLT3.5L40-ST	Ø3.5 mm lag screw - L40 mm - STERILE


* Not anodized



NON LOCKING SCREWS*

Ref.	Description
RLT2.8L10	Ø2.8 mm non-locking screw - L10 mm
RLT2.8L12	Ø2.8 mm non-locking screw - L12 mm
RLT2.8L14	Ø2.8 mm non-locking screw - L14 mm
RLT2.8L16	Ø2.8 mm non-locking screw - L16 mm
RLT2.8L18	Ø2.8 mm non-locking screw - L18 mm
RLT2.8L20	Ø2.8 mm non-locking screw - L20 mm
RLT2.8L22	Ø2.8 mm non-locking screw - L22 mm
RLT2.8L24	Ø2.8 mm non-locking screw - L24 mm
RLT2.8L26	Ø2.8 mm non-locking screw - L26 mm
RLT2.8L28	Ø2.8 mm non-locking screw - L28 mm
RLT2.8L30	Ø2.8 mm non-locking screw - L30 mm
RLT2.8L32	Ø2.8 mm non-locking screw - L32 mm
RLT2.8L34	Ø2.8 mm non-locking screw - L34 mm

* Golden anodized



NON LOCKING SCREWS*

Ref.	Description
RLT3.5L10	Ø3.5 mm non-locking screw - L10 mm
RLT3.5L12	Ø3.5 mm non-locking screw - L12 mm
RLT3.5L14	Ø3.5 mm non-locking screw - L14 mm
RLT3.5L16	Ø3.5 mm non-locking screw - L16 mm
RLT3.5L18	Ø3.5 mm non-locking screw - L18 mm
RLT3.5L20	Ø3.5 mm non-locking screw - L20 mm
RLT3.5L22	Ø3.5 mm non-locking screw - L22 mm
RLT3.5L24	Ø3.5 mm non-locking screw - L24 mm
RLT3.5L26	Ø3.5 mm non-locking screw - L26 mm
RLT3.5L28	Ø3.5 mm non-locking screw - L28 mm
RLT3.5L30	Ø3.5 mm non-locking screw - L30 mm
RLT3.5L32	Ø3.5 mm non-locking screw - L32 mm
RLT3.5L34	Ø3.5 mm non-locking screw - L34 mm
RLT3.5L36	Ø3.5 mm non-locking screw - L36 mm
RLT3.5L38	Ø3.5 mm non-locking screw - L38 mm
RLT3.5L40	Ø3.5 mm non-locking screw - L40 mm

* Fuchsia anodized

→ Ø4.0 MM SCREWS AND WASHER (AVAILABLE ONLY IN STERILE PACKAGING)

OPTIONAL IMPLANTS

Ref.	Description
H1.4QT4.0Lxx-ST	Ø4.0 mm compressive screw - cannula Ø1.4 - short thread - STERILE L26 mm to L48 mm (incrementation of 2 mm)
H1.4IFT4.0Lxx-ST	Ø4.0 mm self-compressive screw - cannula Ø1.4 - short thread - STERILE L26 mm to L48 mm (incrementation of 2 mm)
WASH-T4-ST	Compression washer for Ø4.0 mm compressive screws - STERILE

Remark :

Please note that all implants are also available in sterile packaging.
An 'ST' code is added at the end of the reference.
Ex : «RLT3.5L12-ST»

INSTRUMENTS REFERENCES

FOOTMOTION PLATING SYSTEM KIT INSTRUMENTATION

Ref.	Description	Qty
ANC350	Ø4.5 mm AO quick coupling handle - Size 1	2
ANC575	T8 quick coupling screwdriver	2
ANC576	Ø2.0 mm threaded guide gauge for Ø2.8 mm screws	2
ANC577	Ø2.7 mm threaded guide gauge for Ø3.5 mm screws	2
ANC578	Bending plier	2
ANC586	Ø2.0 mm non threaded bent guide gauge for Ø2.8 mm screws	1
ANC589	Length gauge for Ø2.8 and Ø3.5 mm screws	1
ANC590	Ø2.0 mm quick coupling drill bit - L125 mm	2
ANC591	Ø2.7 mm quick coupling drill bit - L125 mm	2
ANC611	Ø3.0 mm quick coupling drill bit - L125 mm	1
ANC621	Chisel Pauwels - 10*240 mm	1
ANC642	Opening wedge osteotomy instrument	1
33.0212.070	Pin Ø1.2 - L70 mm	5
33.0216.100	Pin Ø1.6 - L100 mm	5
33.0216.150	Pin Ø1.6 - L150 mm	5
D11432M*	Small closed WIRE DISTRATOR Ø1.6 and Ø2.5	1

* Optional

Manufacturer: OURY-GUYE et Fils

MDD Class: I

Notified body: SGS Belgium NV - CE1629

MTP ARTHRODESIS MODULE INSTRUMENTATION

Ref.	Description	Qty
ANC567	Ø16 mm convex reamer	1
ANC568	Ø16 mm concave reamer	1
ANC569	Ø18 mm convex reamer	1
ANC570	Ø18 mm concave reamer	1
ANC571	Ø20 mm convex reamer	1
ANC572	Ø20 mm concave reamer	1
ANC573	Ø22 mm convex reamer	1
ANC574	Ø22 mm concave reamer	1

LAPIDUS ARTHRODESIS MODULE INSTRUMENTATION

Ref.	Description	Qty
------	-------------	-----

PLANTAR NARROW INSTRUMENTATION

ANC841	Ø2.7 mm non threaded bent guide gauge for Ø3.5 mm screws	1
ANC861	Ø2.7 mm cannulated bending drill guide	2

Ø4.0 MM SCREWS INSTRUMENTATION

ANC388	2.5 mm quick coupling hexagonal non prehensor screwdriver - cannula Ø1.4 mm	1
ANC414	Ø2.9 mm drill bit - cannula 1.4 mm - L125 mm - AO Ø4.5 mm quick coupling	1
ANC427	Length gauge for pin Ø1.3 mm - L120 mm	1
ANC664	Ø2.9 mm countersink - cannula Ø1.4 mm - AO quick coupling	1
ANC665	Ø1.4 mm pin guide	1
ANC845	Ø6.0 mm countersink - cannula Ø1.4 mm	1
33.0213.120	Pin Ø1.3 - L120 mm	6

→ PLATE BENDING

The plates of the Footmotion Plating System can be bent using the appropriate bending pliers (ANC578) and by following these instructions:

- Bending is only possible in the areas intended for this purpose,
- A bendable area must be bent only once and in one direction,
- Bending must not be performed excessively,
- The holes must be protected so as to avoid damaging the fixation.

Please refer to the IFU for bending precautions.



REMOVAL SET

If you have to remove FOOTMOTION PLATING SYSTEM implants, make sure to order the **Newclip Technics removal set** which includes the following instruments:

- ANC042: Mini set - Base
- ANC350: Ø4.5 mm AO quick coupling handle - Size 1.
- ANC575: T8 quick coupling screwdriver

To remove any of the Footmotion Plating System plates, first loosen all the screws without completely removing them (this prevents rotation of the plate when removing the last screw). Finally, completely remove all screws and the plate.

INSTRUMENTS REFERENCES

OPTIONAL INSTRUMENTS: MIBO KIT

Ref.	Description	Qty
ANC1057	MIS guide for metatarsal basal closing wedge osteotomy plate - Left	1
ANC1058	MIS guide for metatarsal basal closing wedge osteotomy plate - Right	1
ANC1059	Ø2.0 mm threaded guide gauge for Ø2.8 mm screws - MIS MIBO	3
33.0212.120	Pin Ø1.2 - L120 mm	5

OPTIONAL STERILE INSTRUMENTS

Ref.	Description
ANC590-ST	Ø2.0 mm quick coupling drill bit - L 125 mm - STERILE
ANC591-ST	Ø2.7 mm quick coupling drill bit - L 125 mm - STERILE
ANC926-ST	Olive pin Ø1.2 - L70 mm - STERILE
33.0212.070-ST	Pin Ø1.2 - L70 mm - STERILE
33.0216.100-ST	Pin Ø1.6 - L100 mm - STERILE
33.0216.150-ST	Pin Ø1.6 L150 mm - STERILE

PSI OPTIONS

Ref.	Description	Qty
ANC863	Ø1.9 mm pin for cutting guide – L15 mm	4
ANC880	Ø1.9 mm pin for cutting guide – L30 mm	4
ANC1113	Patient specific cutting guide for foot osteotomy	1
ANC1219	Ø2.6 mm pin for cutting guide – L30 mm	4
ANC1220	Ø2.6 mm pin for cutting guide – L15 mm	4
ANC1349	Ø1.2 mm - L10 mm holding plot	3
ANC1350	Ø2.2 mm - L10 mm holding plot	3
ANC1771	Ø1.6 mm holding plot	3
33.0216.150	Pin Ø1.6 - L150 mm	4
33.0222.120	Pin Ø2.2 - L200 mm	4


COMPATIBLE WITH PATIENT SPECIFIC INSTRUMENTATION (PSI)



Please refer to the brochure FPS PSI and contact your NEWCLIP TECHNICS representative if you have questions about the availability of NEWCLIP TECHNICS products in your area.

KIT DESCRIPTION

FOOTMOTION PLATING SYSTEM KIT

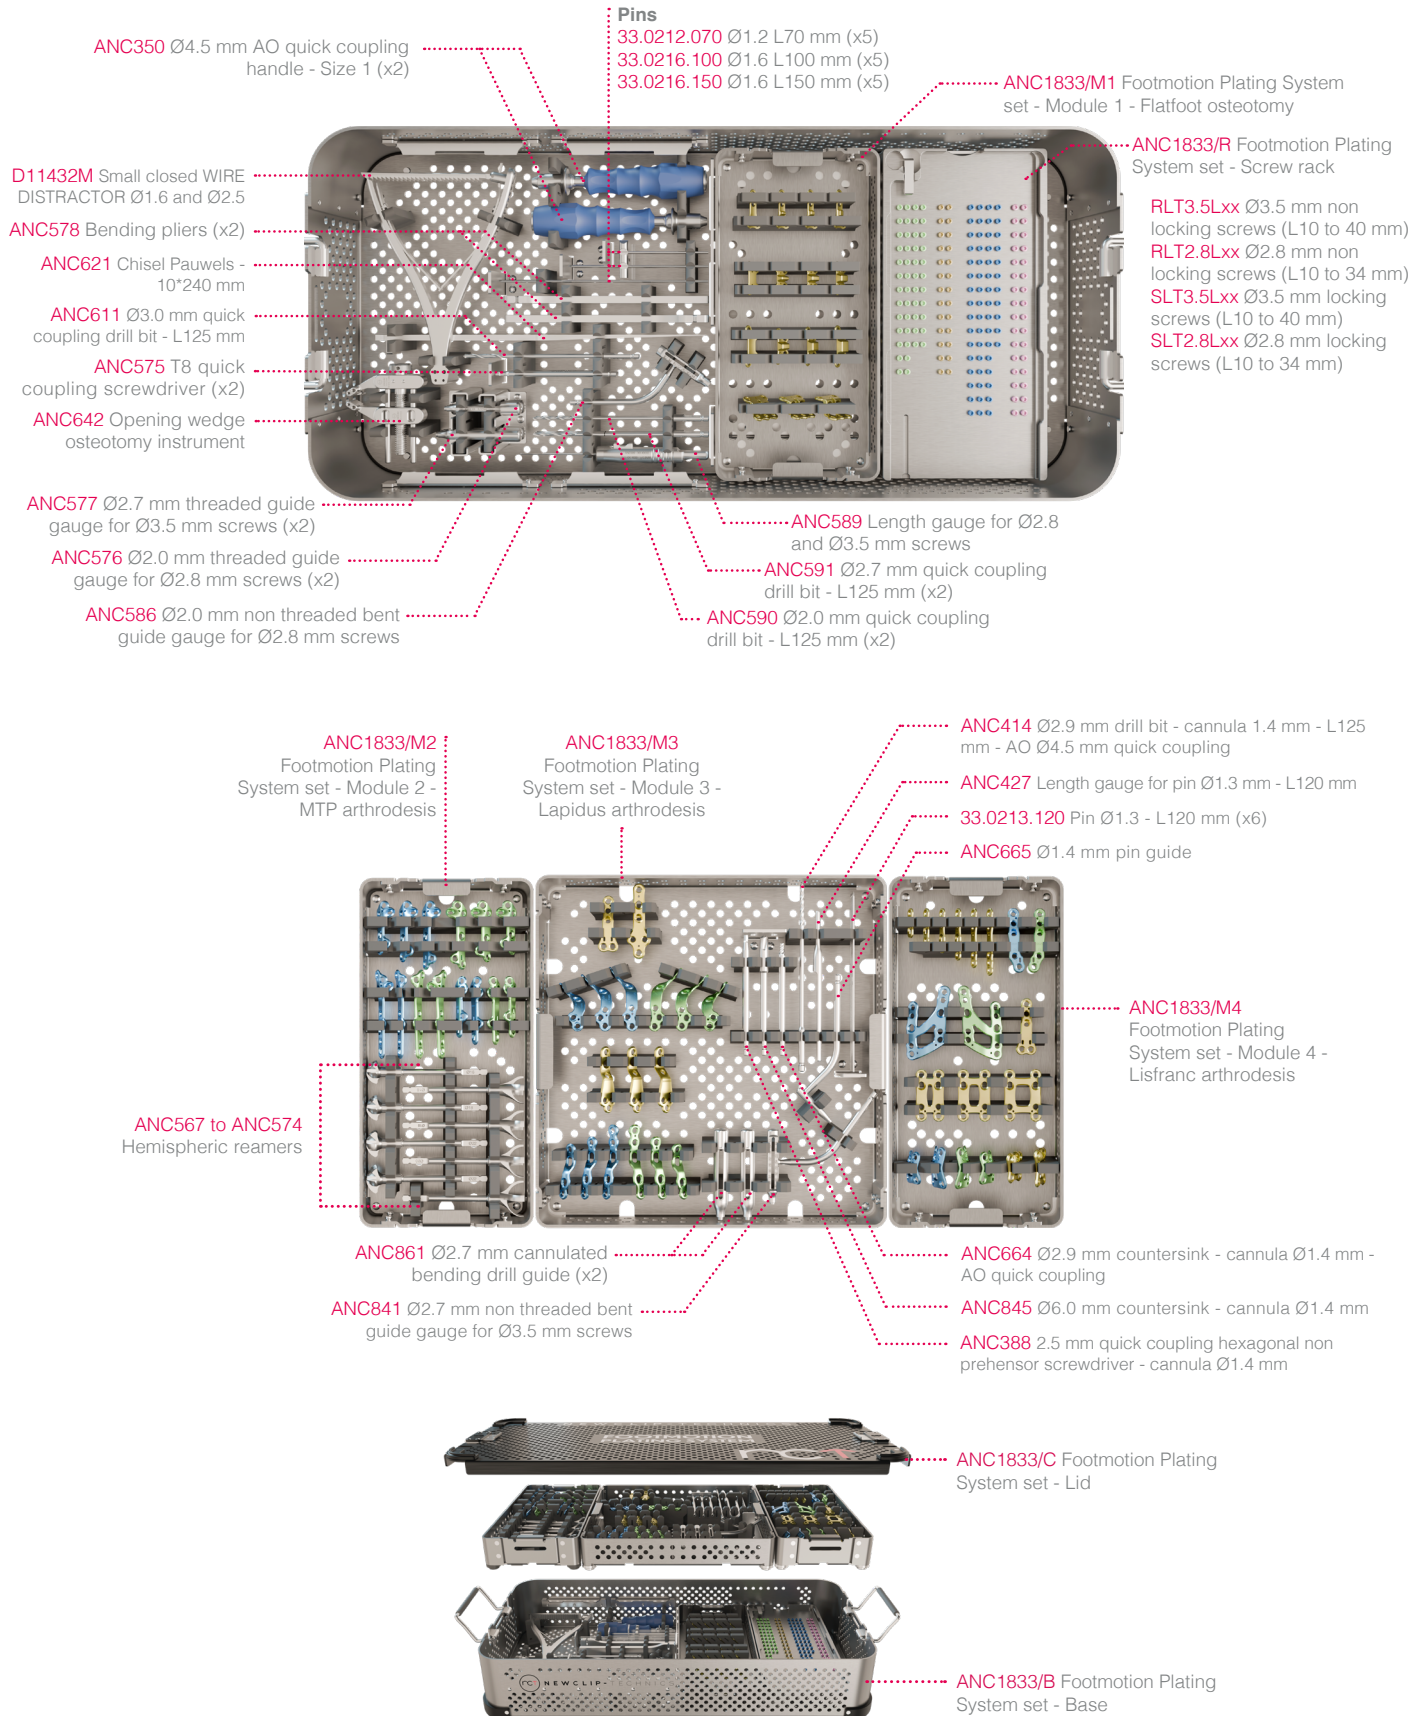


KIT DESCRIPTION

OPTIONAL KIT

→ MIBO KIT

ANC1059 Ø2.0 mm threaded guide gauge for
Ø2.8 mm screws - MIS MIBO (x3)

33.0212.120 Pin Ø1.2 L120 mm (x5)

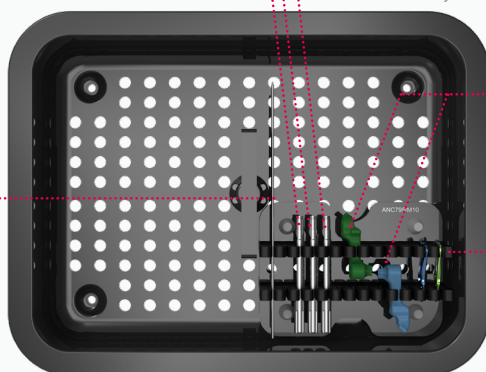

ANC791/C2 Footmotion Plating
System - MIBO set - Lid

ANC791/B Footmotion Plating
System - Options set - Base

MIS guide for metatarsal basal
closing wedge osteotomy plate
ANC1057 Left
ANC1058 Right

ANC795/M10 Xpert Wrist 2.4 -
Fragment Specific set -
Module 10 - 13 slots



This information is intended to demonstrate the Newclip Technics portfolio of medical devices. Always refer to the package insert, product label and/or user instructions including cleaning and sterilization before using any Newclip Technics product. These products must be handled and/or implanted by trained and qualified staff who have read the instructions before use. A surgeon must always rely on her or his own professional clinical judgement when deciding whether to use a particular product when treating a particular patient. Product availability is subject to the regulatory or medical practices that govern individual markets. Please contact your Newclip Technics representative if you have questions about the availability of Newclip Technics products in your area.

Manufacturer: Newclip Technics - Brochure EN - Footmotion Plating System - Ed.12 - 11/2025 - Medical device EC: class IIb - CE1639 SGS BE - Read labelling and instructions before the use of Newclip Technics medical devices. These products must be handled and/or implanted by trained and qualified staff who have read the instructions before use. Non-contractual pictures.
Newclip Technics - 45 rue des Garottières - 44115 Haute Goulaine, France. Our subsidiaries: Newclip USA - Newclip Australia - Newclip Germany - Newclip Japan - Newclip Iberia - Newclip Belgium - Newclip Italia.

newcliptechnics.com

